



**D-IPS PANEL**  
DURAPLAN INTEGRATED PLUMBING & SERVICES PANEL



Space saving, pre-fabricated  
panelling solution for your  
healthcare environment.



D-IPS PANEL

## COST-EFFECTIVE AND FULLY COMPLIANT.

Efficient installation, cost-effective solution, robust product quality, hygienic and hassle-free operation – these are the key modification in our innovative integrated panel systems.

- + Euro Design IP
- + Proven Designs
- + Suits New & Existing Facilities
- + Speedy Install
- + Designed with plumbers, for plumbers
- + Easy Access & Serviceability
- + Pre-Machined for Sanitaryware & Outlets



■ INTEGRATED PANEL SYSTEM



### CUSTOMIZATION OPTIONS

Suited to fit any brand of sanitary fixtures and plumbing configuration, it also has an easy access system for services and maintenances while concealing all plumbing works. We offer wide choice of finishing options.



### EASY INSTALLATION

Significantly reduces the installation time as its simple to install. The panel system arrives on site ready to install.



### HIGHLY COST-EFFECTIVE

Our integrated panel system due to its high efficiency offers significant cost savings over traditional methodology. Its concealed design and security feature prevents risk of vandalism and any other on-site damage possibility



## SECTORS

D-IPS is our ground-breaking, integrated panel system. It's simple, flexible and compatible with all our products. Plus, it's adaptable enough to work across any sector.



### VANITY

- Rigid Panel Strength
- Easy for Plumbing
- Removable Lower Panel
- Hinging Upper Panel



### TOILET

- Suits Back to Wall
- Ideal for in Wall Cisterns
- Easy access for service



### BED HEAD

- Customizable for gas/power/nurse call points
- No exposed MDF edges
- High Impact resistance



## CONFIGURATIONS

Available in different configurations and sectors, D-IPS is suitable for every type of wet or dry environment, allowing you to specify the most appropriate panel option to meet the site requirements and your budget.

### RECESSED (NEW BUILD)



### WALL MOUNTED (REFURB)



#### DIMENSIONS:

- **Width:**
  - Up to 900mm wide
- **Height:**
  - Full height – up to 3600mm
  - Standard – 1800mm
  - Half Size – 1200mm


#### PANEL CONFIGURATION:

- Top Panel: Fixed
- Access Panels: Top-hinge or removable clips with security lock
- Sanitaryware Panel: Fixed




# CONSTRUCTION

Our design team created D-IPS to ensure that's what you get. We provide easy construction and installation steps, so you can be up and running in the shortest possible time frame, with a guaranteed quality finish.

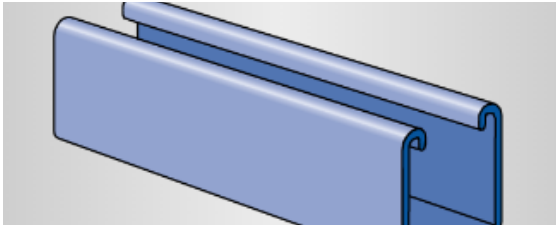

FRAME: Structural 40x40mm Aluminum

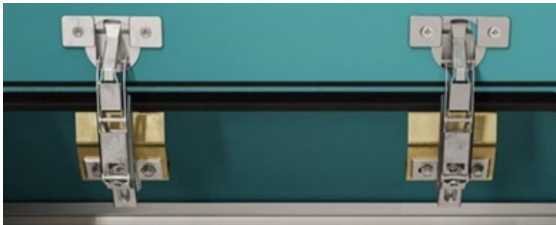

HINGES: HD Cabinet Hinges, Safety Stays, Stainless Steel Fixings



PANEL: Construction out of 13mm Anti-Bacterial Compact Laminate



HARDWARE: Security Screws and Locks Available



PLUMBING INTEGRATION



*Duraplan's Integrated Panel System is synonymous with innovation and leading edge in the pre-plumbed system. We offer a wide range of customization options for our Panel System. Our technical team will help you incorporate these features in creating an end product that suits your needs.*



# INFECTION CONTROL

DIPS is a system made from 13mm compact laminate panels, designed to connect and conceal healthcare services at the patient's location. Being a pre-fabricated system, these service panels speed up patient room downtime, while providing super fast assembly & reconfiguration for adapting to the needs in a rapidly evolving environment. DIPS not only promotes the patient recovery process but provides a flexible and robust material, a balance of style, comfort and top-grade finishing.

## Where healthcare & design connect.

- Considering the source of infection in healthcare facilities, Waterborne Pathogen Proliferation (WPP) occurs through the potable water source into the facility, opportunist pathogens and patient infection.
- As water is a source and vector of infection, we understand it is critical for wet-area fixtures to have strict infection control measures.
- Some high-risk pathogens can exist for a time in a biofilm when the water evaporates.
- Waterborne Healthcare Associated Infections (wHAIs) are significantly reduced by the construction materials and configuration of the panel
- The construction of the D-IPS controls WPP and wHAIs by all exposed surfaces being from solid grade compact laminate.
  - Impermeable – will not absorb or harbour wHAIs
  - Anti-microbial – meaning any microbes, infection and pathogens including biofilm are actively destroyed when they reside on the compact laminate panel
  - Smooth, solid surface – easy to clean, and resistant to antibacterial chemicals
  - 2mm flash-gaps between panels, minimizing the risk of water pooling between panels



- INTEGRATED PANEL SYSTEM



**09 972 7682**

**[www.duraplan.co.nz](http://www.duraplan.co.nz)**

For help and advice on choosing your D-IPS solution, visit our website or get in touch with our team for a comprehensive guide and a consultation!

