

TECHNICAL GUIDE

Classic Range

Strong, Robust & Multifunctional Cubicles in Classic Designs.

09 972 7682 sales@duraplan.co.nz www.duraplan.co.nz

Resistant to: Impact, Moisture, Wear & Graffiti

| SYSTEM INFORMATION

- 13mm compact laminate panels which are anti-bacterial, impact, moisture, wear and graffiti resistant, easy to clean/keep clean and have a 10-year panel integrity
- · Strong Aluminium Support Frames
- Vertical aluminium support posts fixed directly to the floor with concealed fixings and are fixed at the top through the headrail and compact laminate panels - providing extra vertical strength and lateral stability
- Extra lateral rigidity is provided by a continuous aluminium headrail fixed to the frames and panels
- Quality brushed stainless indicator locks, coat hooks & hinges

| PANEL INFORMATION

- · Available in standard 13mm thickness
- 13mm resin bonded core, Compact Laminate tested to IS EN 438-4
- · Resistance too: Impact, Moisture, Wear & Graffiti
- Antibacterial JIS 2 2801: Antibacterial eliminates the growth of early 99% of common forms of bacteria on any DuraLam surface growth of nearly 99% of common forms of bacteria
- Fire protection NZBC C/AS2 AS7
- We offer a 10 year guarantee on panel integrity
- Duralam Compact Laminate Panels are Greenguard

| ALUMINIUM INFORMATION

- HEAD RAIL: Oval 100mm x 33mm Extruded Aluminium alloy 6060 with exposed face with anodised or powder coated finish head rail.
- HEAD RAIL/POST: Square 40mm x 40mm
 Extruded Aluminium alloy 6060 with exposed face with anodised or powder coated finish head rail.
- WALL CHANNEL: 60mm x 50mm rounded edged extruded aluminium alloy 6060 with anodised or powder coated finish wall channel.
- · COLOUR OPTIONS:
 - · Silver Anodised (Standard)
 - Black Anodised
 - Silver Pearl Powder Coated (Standard)



| PANEL COLOUR OPTIONS

The Classic Range is available in:

- DuraLam Panel Colour Range stocked & Extended Range
- · Laminex Colour Range

| PANEL FINISH OPTIONS

The Compact Laminate Panel Finish is available in:

- Suede (Standard)
- Finguard (Anti-fingerprint)
- Gloss
- Decorative


| WARRANTY DETAILS

Our Standard Warranties are:

- · 10 Years on Panel Integrity
- · 2 Years on Hardware
- 2 Years on Installation

DURAPLAN.CO.NZ 02

Resistant to: Impact, Moisture, Wear & Graffiti

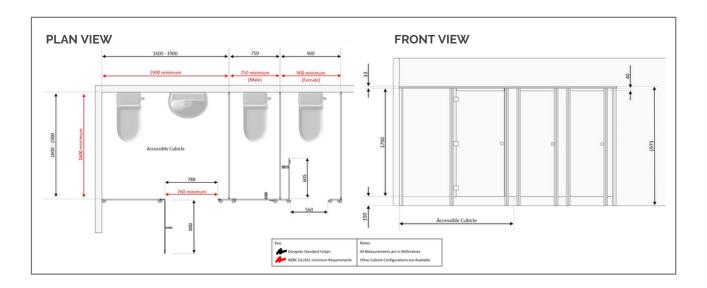

| HARDWARE INFORMATION

FINISH:

- · Quality and solid stainless hardware
- Brushed Stainless
- · Black Powder Coated

MOUNTING:

- · Concealed Screw Fix
- · Surface Mounted

FEATURES:

- · Quality indicator locks, coat hooks & hinges
- · Robust & Durable Fittings
- Door opening or closing is spring assisted
- Fully Adjustable Spring Hinges to suit door
- · Can be set to Hold Open / Hold Closed
- · Disabled Lock Option

DURAPLAN 100 SERIES



DURAPLAN 200 SERIES



| DIMENSION DETAILS

Duraplan Cubicle Partitions are customised to fit your measurements, depths and widths can be varied to suit. The Classic Range standard dimensions are:

- Height 1975mm with 150mm floor clearance
- Depth 1600mm-1830mm
- Standard Cubicle Doors are 600mm
- Open-in door option is recommended for standard cubicles
- Accessible / Disabled Cubicles:
 - 1900 x 1600mm (Toilet & Basin)
 - 2100 x 1900mm (Toilet, Shower & Basin)
 - 788 mm Doors Swing Hinge or sliding doors

| WARRANTY DETAILS

- 10 Years on Panel Integrity
- · 2 Years on Hardware
- 2 Years on Installation

Please contact us for Colour Samples or for further product information & details.

WWW.DURAPLAN.CO.NZ

DURAPLAN.CO.NZ 03

